

QORVO

SiC JFET Division

Is Now Part of


onsemi™

To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

DATASHEET

UG4SC075006K4S

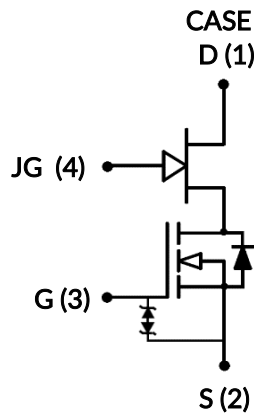

Silicon Carbide (SiC) Combo JFET - EliteSiC, Power N-Channel, TO-247-4L, 750 V, 5.3 mohm

Rev. C, January 2025

Description

Qorvo's UG4SC075006K4S "Combo-FET" integrates both a 750V SiC JFET and a Low Voltage Si MOSFET into a single TO-247-4L package. This innovative approach allows users to create circuitry that would enable a normally-off switch while leveraging the benefits of a normally-on SiC JFET. These benefits include ultra-low on-resistance ($R_{DS(on)}$) to minimize conduction losses and the exceptional robustness characteristic of a simplified JFET device structure, making it capable of handling the high-energy switching required in circuit protection applications. For switch-mode power conversion application, this device provides separate access to the JFET and MOSFET gates for improved speed control and ease of paralleling multiple devices.

Features

- ◆ Single digit $R_{DS(on)}$
Normally-off capability
- ◆ Improved speed control
- ◆ Improved parallel device operation (3+ FETs)
- ◆ Operating temperature: 175°C (max)
- ◆ High pulse current capability
- ◆ Excellent device robustness
- ◆ Silver-sintered die attach for excellent thermal resistance
- ◆ Short circuit rated
- ◆ AECQ Qualified

Typical applications

- ◆ Solid State / Semiconductor Circuit Breaker
- ◆ Solid State / Semiconductor Relay
- ◆ Battery Disconnects
- ◆ Surge Protection
- ◆ Inrush Current Control
- ◆ High power switch mode converters (>25kW)

Part Number	Package	Marking
UG4SC075006K4S	TO-247-4L	UG4SC075006K4S



Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	V_{DS}		750	V
JFET Gate (JG) to source voltage	V_{JGS}	DC	-30 to +3	V
		AC ¹	-30 to +30	V
MOSFET Gate (G) to source voltage	V_{GS}	DC	-20 to +20	V
		AC ($f > 1\text{Hz}$)	-25 to +25	V
Continuous drain current ²	I_D	$T_C < 125^\circ\text{C}$	120	A
Pulsed drain current ³	I_{DM}	$T_C = 25^\circ\text{C}$	588	A
Single pulsed avalanche energy ⁴	E_{AS}	$L=15\text{mH}, I_{AS} = 6.5\text{A}$	316	mJ
Power dissipation	P_{tot}	$T_C = 25^\circ\text{C}$	714	W
Maximum junction temperature	$T_{J,max}$		175	$^\circ\text{C}$
Operating and storage temperature	T_J, T_{STG}		-55 to 175	$^\circ\text{C}$
Max. lead temperature for soldering,	T_L		250	$^\circ\text{C}$

- +30V AC rating applies for turn-on pulses <200ns applied with external $R_G > 1\Omega$.
- Limited by bondwires
- Pulse width t_p limited by $T_{J,max}$
- Starting $T_J = 25^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case	$R_{\theta JC}$			0.16	0.21	$^\circ\text{C}/\text{W}$

Electrical Characteristics ($T_J = +25^\circ\text{C}$ and $V_{JGS} = 0\text{V}$ unless otherwise specified)

Typical Performance - Static

Parameter	Symbol	Test Conditions	Value			Units	
			Min	Typ	Max		
Drain-source breakdown voltage	BV_{DS}	$V_{GS}=0\text{V}, V_{JGS}=0\text{V}, I_D=1\text{mA}$	750			V	
Total drain leakage current	I_{DSS}	$V_{DS}=750\text{V}, V_{GS}=0\text{V}, V_{JGS}=0\text{V}, T_J=25^\circ\text{C}$		6	130	μA	
		$V_{DS}=750\text{V}, V_{GS}=0\text{V}, V_{JGS}=0\text{V}, T_J=175^\circ\text{C}$		45			
Total JFET gate leakage current	I_{JGSS}	$V_{JGS}=-20\text{V}, V_{GS}=12\text{V}$		0.1	100	μA	
Total MOSFET gate leakage current	I_{GSS}	$V_{GS}=-20\text{V} / +20\text{V}$		6	20	μA	
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS}=12\text{V}, I_D=80\text{A}$	$V_{JGS}=2\text{V}, T_J=25^\circ\text{C}$		5.3	$\text{m}\Omega$	
			$T_J=25^\circ\text{C}$		5.9		7.5
			$T_J=125^\circ\text{C}$		9.8		
			$T_J=175^\circ\text{C}$		12.9		
JFET gate threshold voltage	$V_{JG(th)}$	$V_{DS}=5\text{V}, V_{GS}=12\text{V}, I_D=180\text{mA}$	-8.3	-6.0	-3.7	V	
MOSFET gate threshold voltage	$V_{G(th)}$	$V_{DS}=5\text{V}, V_{JGS}=0\text{V}, I_D=10\text{mA}$	4	4.7	6	V	
JFET gate resistance	R_{JG}	$f=1\text{MHz}, \text{open drain}$		0.8		Ω	
MOSFET gate resistance	R_G	$f=1\text{MHz}, \text{open drain}$		0.8		Ω	

Typical Performance - Reverse Diode

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Diode continuous forward current ¹	I_S	$T_C < 125^\circ\text{C}$			120	A
Diode pulse current ²	$I_{S,pulse}$	$T_C = 25^\circ\text{C}$			588	A
Forward voltage	V_{FSD}	$V_{GS}=0\text{V}, V_{JGS}=0\text{V}, I_S=50\text{A}, T_J=25^\circ\text{C}$		1.03	1.16	V
		$V_{GS}=0\text{V}, V_{JGS}=0\text{V}, I_S=50\text{A}, T_J=175^\circ\text{C}$		1.06		
Reverse recovery charge	Q_{rr}	$V_{DS}=400\text{V}, I_S=80\text{A}, V_{GS}=0\text{V}, V_{JGS}=0\text{V}, R_{JG}=0.7\Omega, di/dt=2400\text{A}/\mu\text{s}, T_J=25^\circ\text{C}$		377		nC
Reverse recovery time	t_{rr}	$T_J=25^\circ\text{C}$		70		ns
Reverse recovery charge	Q_{rr}	$V_{DS}=400\text{V}, I_S=80\text{A}, V_{GS}=0\text{V}, V_{JGS}=0\text{V}, R_{JG}=0.7\Omega, di/dt=2400\text{A}/\mu\text{s}, T_J=150^\circ\text{C}$		427		nC
Reverse recovery time	t_{rr}	$T_J=150^\circ\text{C}$		78		ns

Typical Performance - Dynamic with MOSFET gate as control terminal and $V_{GS}=0V$

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
MOSFET input capacitance	C_{iss}	$V_{DS}=400V, V_{GS}=0V,$ $f=100kHz$		8374		pF
Output capacitance	C_{oss}			362		
Reverse transfer capacitance	C_{rss}			4		
Effective output capacitance, energy related	$C_{oss(er)}$	$V_{DS}=0V$ to 400V, $V_{GS}=0V$		475		pF
Effective output capacitance, time related	$C_{oss(tr)}$			950		pF
C_{OSS} stored energy	E_{oss}	$V_{DS}=400V, V_{GS}=0V$		38		μJ
Total Gate charge	Q_G	$V_{DS}=400V, I_D=80A,$ $V_{GS} = 0V$ to 15V		164		nC
Gate-drain charge	Q_{GD}			24		
Gate-source charge	Q_{GS}			46		
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6 $V_{DS}=400V, I_D=80A,$ $V_{GS}=0V$ to +15V, $R_{G_ON}=1\Omega, R_{G_OFF}=10\Omega,$ $R_{JG_ON}=0.7\Omega, R_{JG_OFF}=10\Omega,$ Inductive Load, FWD: same device with $V_{GS} = 0V, R_G=10\Omega,$ $R_{JG_ON} = 0.7\Omega, T_J=25^\circ C$		30		μs
Rise time	t_r			116		
Turn-off delay time	$t_{d(off)}$			148		
Fall time	t_f			120		
Turn-on energy	E_{ON}			2185		
Turn-off energy	E_{OFF}		1690			
Total switching energy	E_{TOT}		3875			
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6 $V_{DS}=400V, I_D=80A,$ $V_{GS}=0V$ to +15V, $R_{G_ON}=1\Omega, R_{G_OFF}=10\Omega,$ $R_{JG_ON}=0.7\Omega, R_{JG_OFF}=10\Omega,$ Inductive Load, FWD: same device with $V_{GS} = 0V, R_G=10\Omega,$ $R_{JG_ON} = 0.7\Omega, T_J=150^\circ C$		28		μs
Rise time	t_r			124		
Turn-off delay time	$t_{d(off)}$			156		
Fall time	t_f			103		
Turn-on energy	E_{ON}			2377		
Turn-off energy	E_{OFF}		1569			
Total switching energy	E_{TOT}		3946			

5. Measured with the half-bridge mode switching test circuit in Figure 23.

6. Devices are driven with the ClampDRIVE method as described in the section "Recommended Gate Drive Approach: ClampDRIVE"

Typical Performance - Dynamic with JFET gate as control terminal and $V_{GS}=+12V$

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
JFET input capacitance	C_{Jiss}	$V_{DS}=400V, V_{JGS}=-20V,$ $f=100kHz$		3028		pF
JFET output capacitance	C_{Joss}			364		
JFET reverse transfer capacitance	C_{Jrss}			360		
JFET total gate charge	Q_{JG}	$V_{DS}=400V, I_D=80A,$ $V_{JGS} = -18V \text{ to } 0V$		400		nC
JFET gate-drain charge	Q_{JGD}			270		
JFET gate-source charge	Q_{JGS}			60		

Typical Performance Diagrams - MOSFET gate as control terminal and $V_{JGS}=0V$

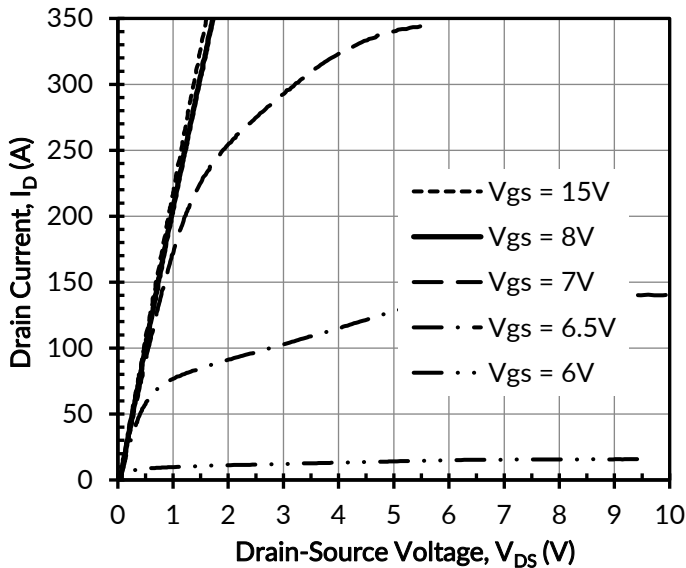


Figure 1. Typical output characteristics at $T_j = -55^\circ C$, $t_p < 250\mu s$

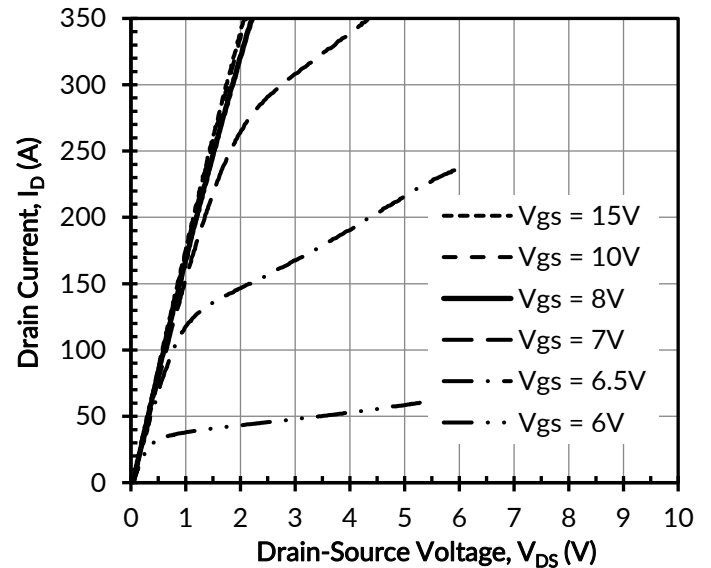


Figure 2. Typical output characteristics at $T_j = 25^\circ C$, $t_p < 250\mu s$

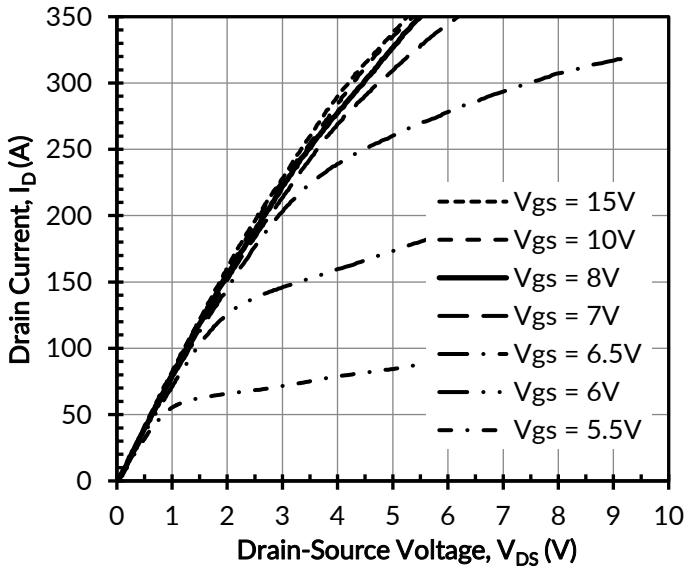


Figure 3. Typical output characteristics at $T_J = 175^\circ\text{C}$, $t_p < 250\mu\text{s}$

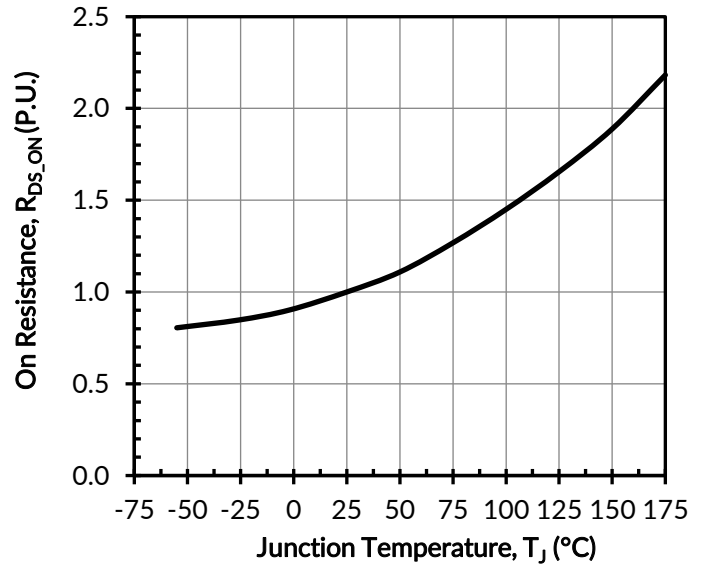


Figure 4. Normalized on-resistance vs. temperature at $V_{GS} = 12\text{V}$ and $I_D = 80\text{A}$

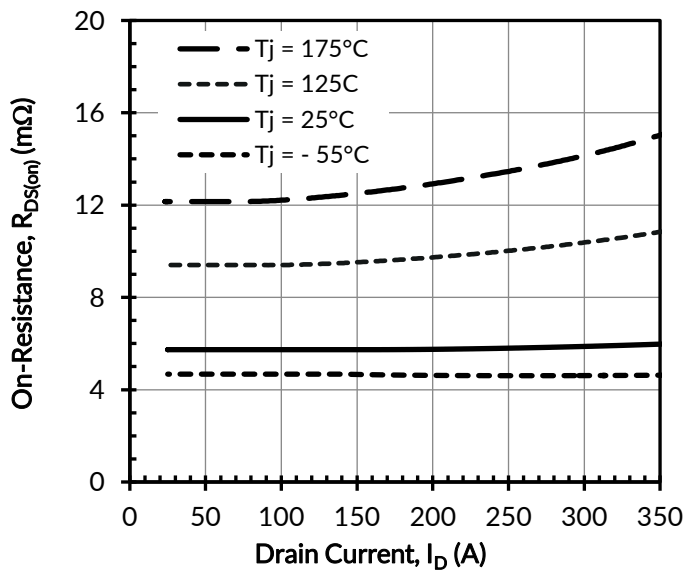


Figure 5. Typical drain-source on-resistances at $V_{GS} = 12\text{V}$

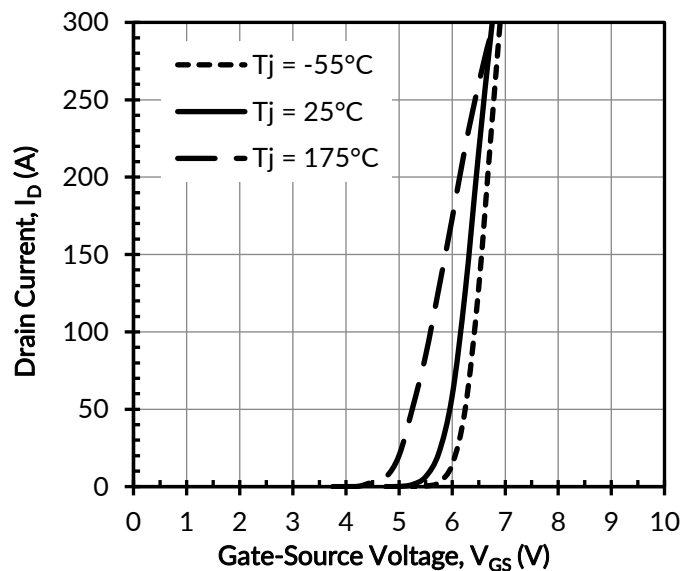


Figure 6. Typical transfer characteristics at $V_{DS} = 5\text{V}$

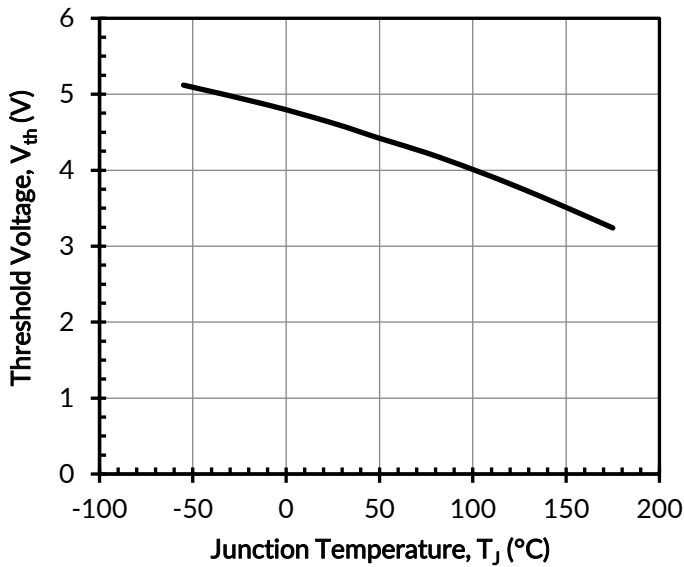


Figure 7. Threshold voltage vs. junction temperature at $V_{DS} = 5V$ and $I_D = 10mA$

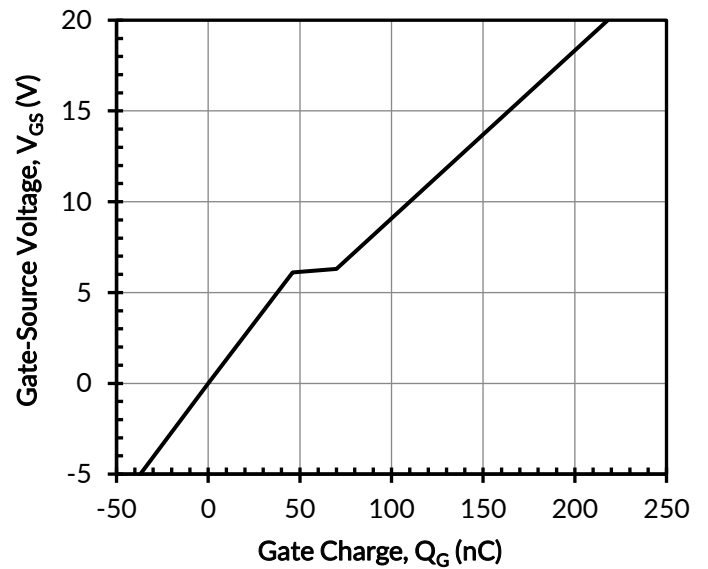


Figure 8. Typical gate charge at $V_{DS} = 400V$ and $I_D = 80A$

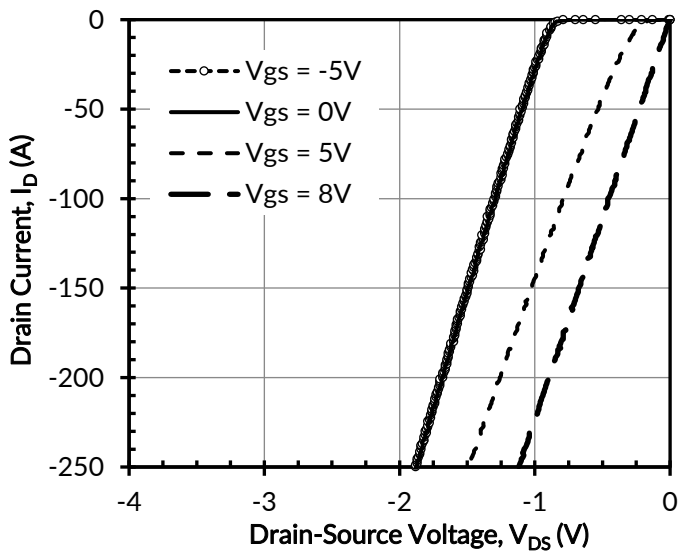


Figure 9. 3rd quadrant characteristics at $T_j = -55^\circ C$

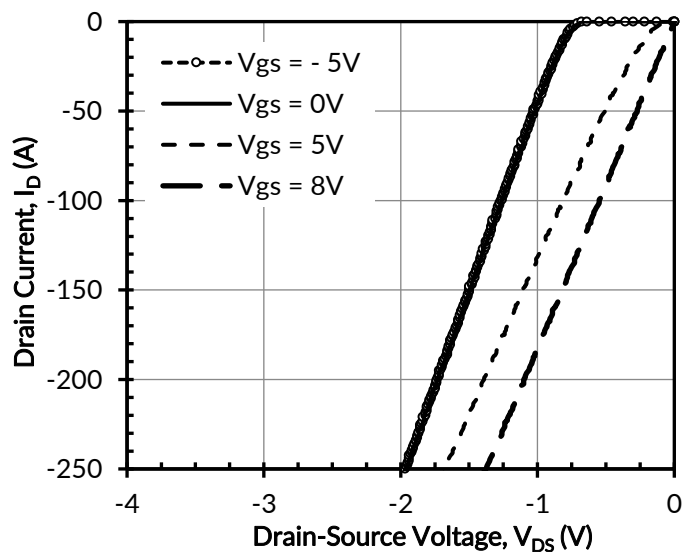


Figure 10. 3rd quadrant characteristics at $T_j = 25^\circ C$

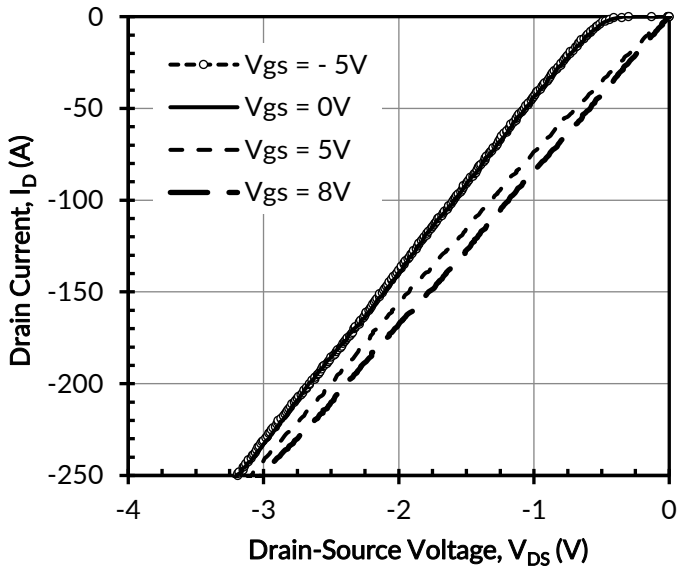


Figure 11. 3rd quadrant characteristics at $T_j = 175^\circ\text{C}$

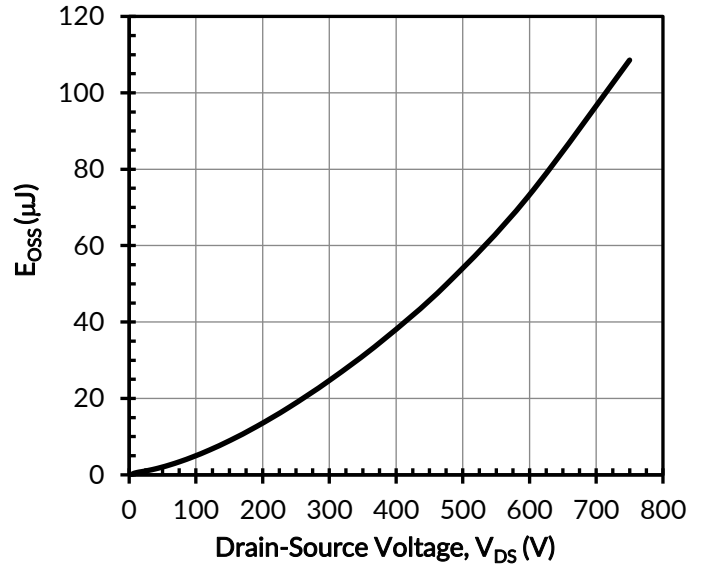


Figure 12. Typical stored energy in C_{OSS} at $V_{GS} = 0\text{V}$

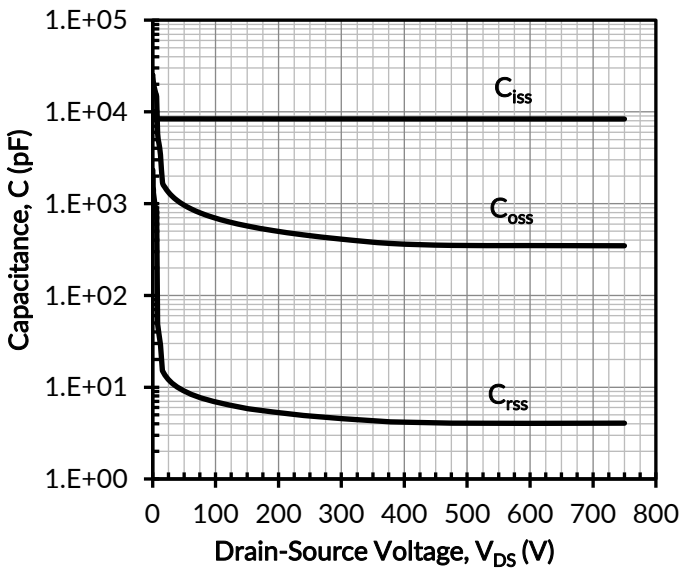


Figure 13. Typical capacitances at $f = 100\text{kHz}$ and $V_{GS} = 0\text{V}$

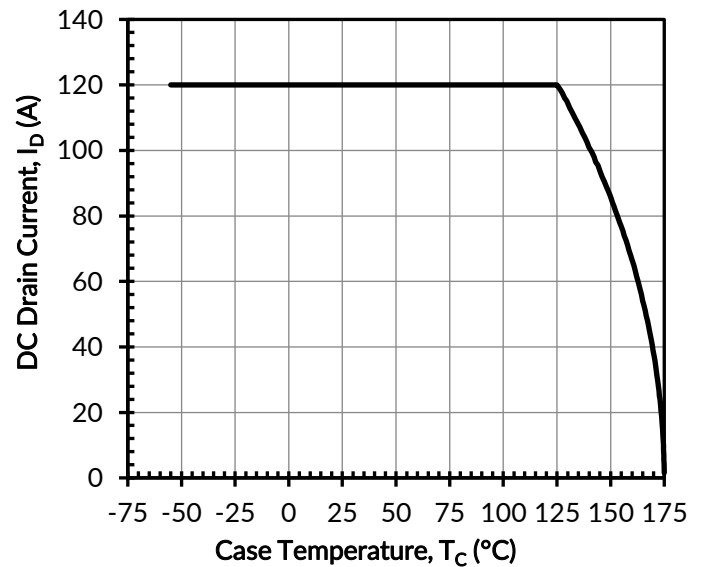


Figure 14. DC drain current derating

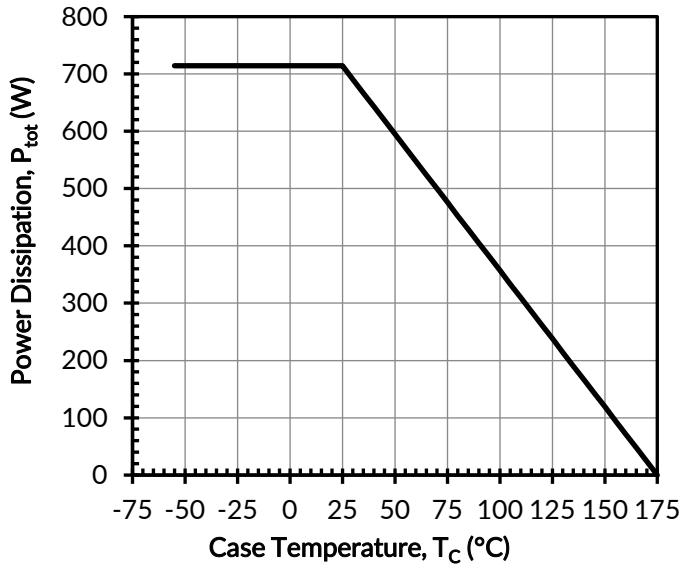


Figure 15. Total power dissipation

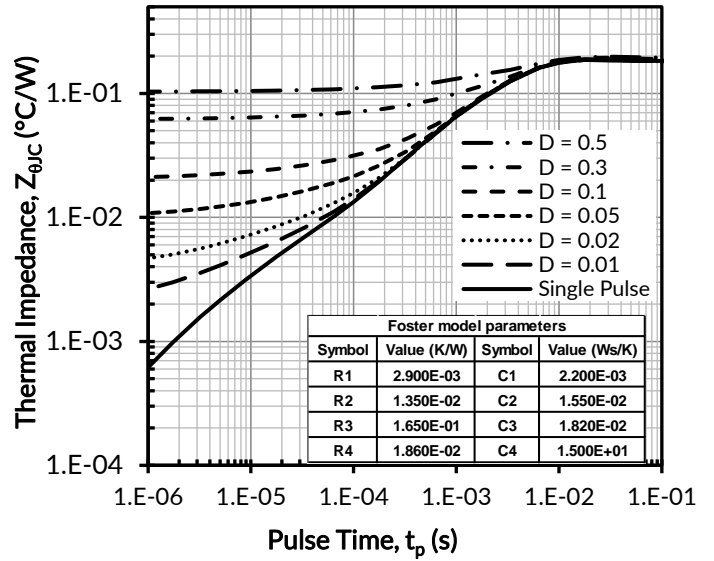


Figure 16. Maximum transient thermal impedance

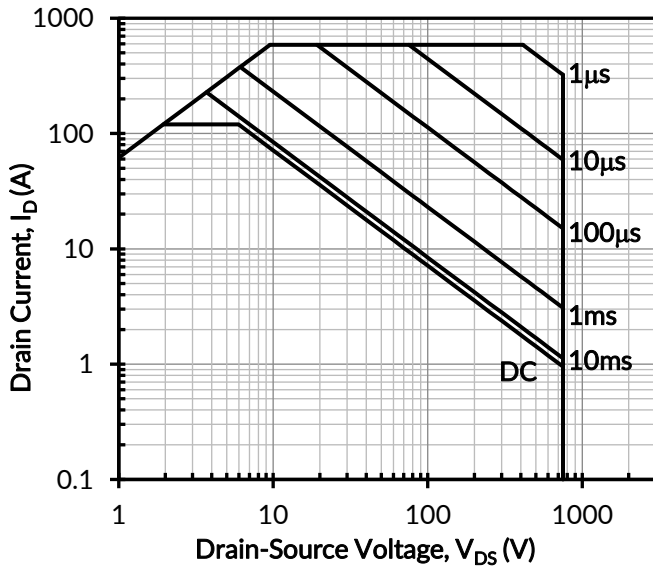


Figure 17. Safe operation area at $T_C = 25^\circ\text{C}$, $D = 0$, Parameter t_p

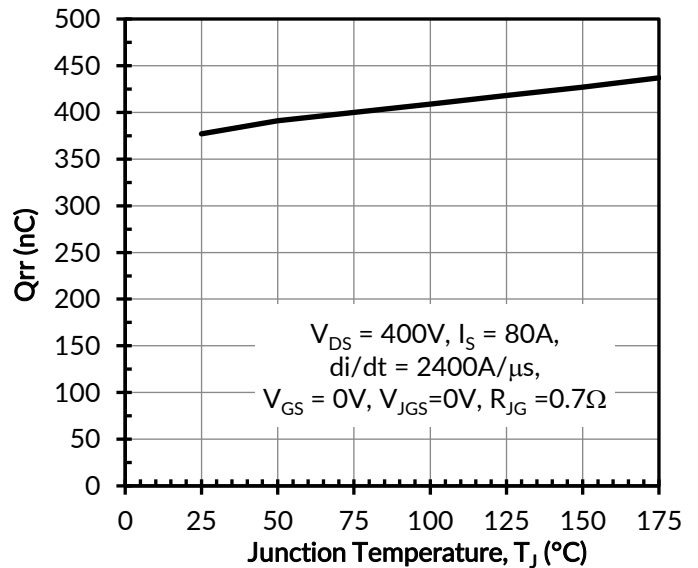


Figure 18. Reverse recovery charge Q_{rr} vs. junction temperature

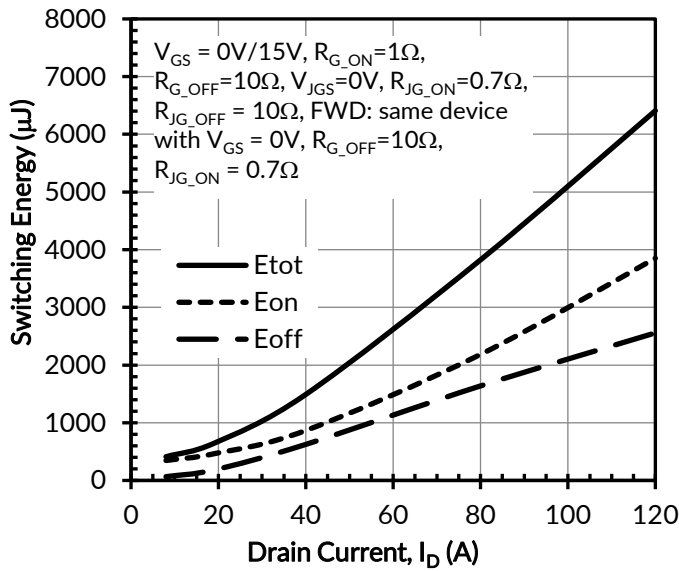


Figure 19. Clamped inductive switching energy vs. drain current at $V_{DS} = 400V$ and $T_J = 25^\circ C$

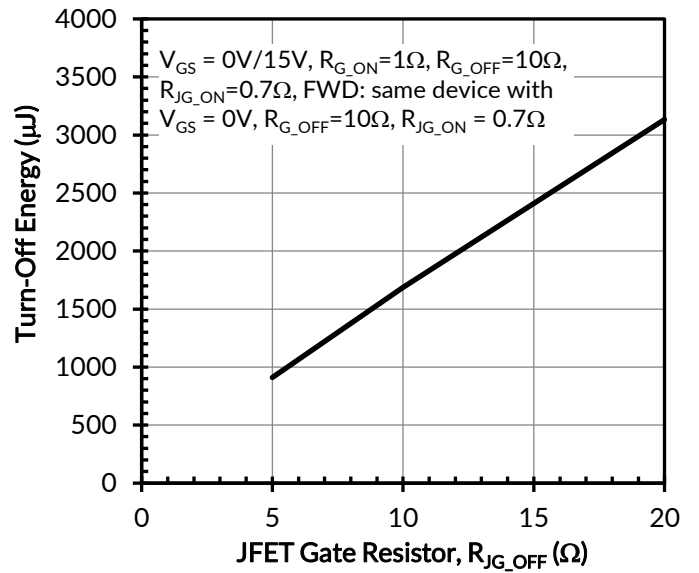


Figure 20. Clamped inductive turn-off energy vs. JFET gate resistor R_{JG_OFF} at $V_{DS} = 400V$, $I_D = 80A$, and $T_J = 25^\circ C$

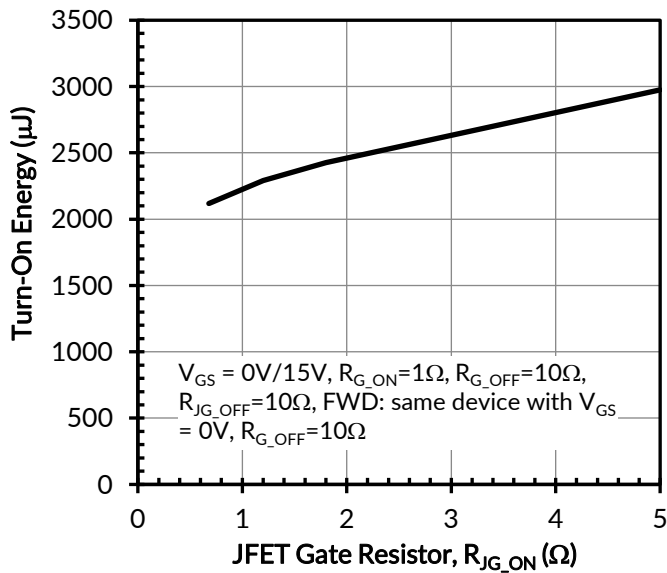


Figure 21. Clamped inductive turn-on energy vs. JFET gate resistor R_{JG_ON} at $V_{DS} = 400V$, $I_D = 80A$, and $T_J = 25^\circ C$

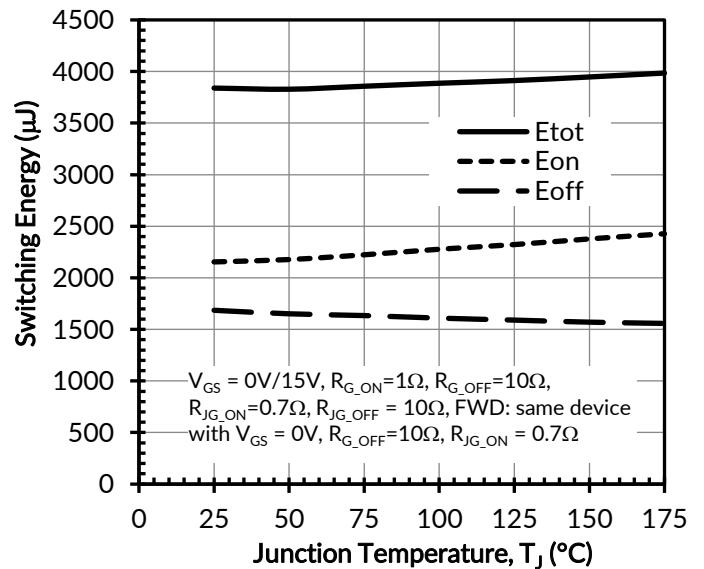


Figure 22. Clamped inductive switching energy vs. junction temperature at $V_{DS} = 400V$ and $I_D = 80A$

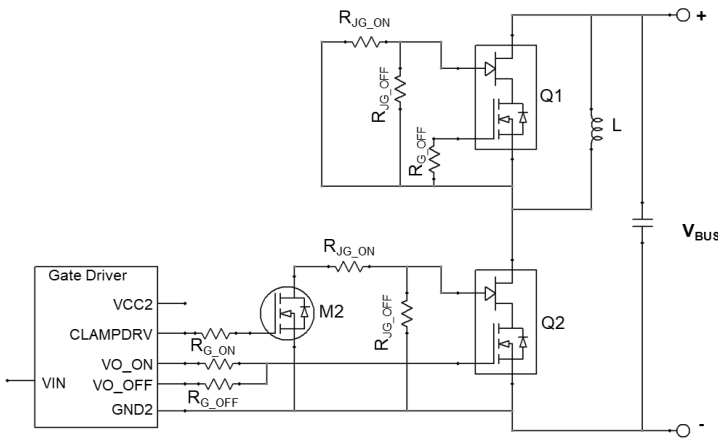


Figure 23. Schematic of the half-bridge mode switching test circuit with ClampDRIVE method.

Typical Performance Diagrams - JFET gate as control terminal and $V_{GS}=+12V$

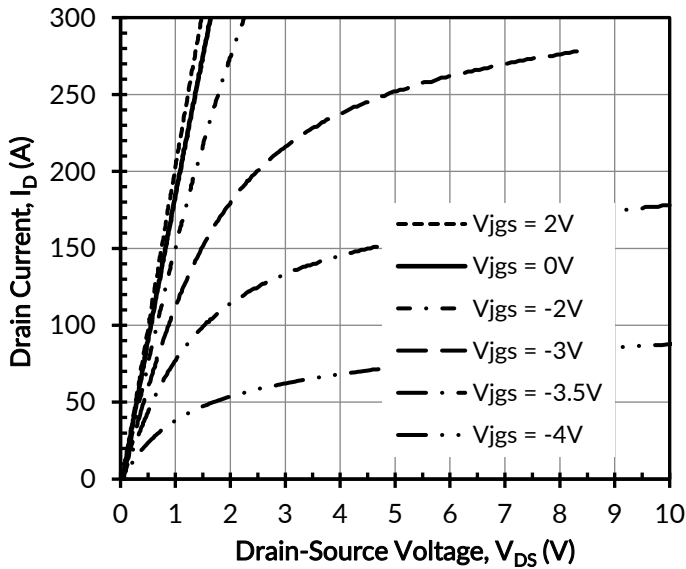


Figure 24. Typical output characteristics with JFET gate as control at $T_J = -55^\circ C$, $t_p < 250\mu s$

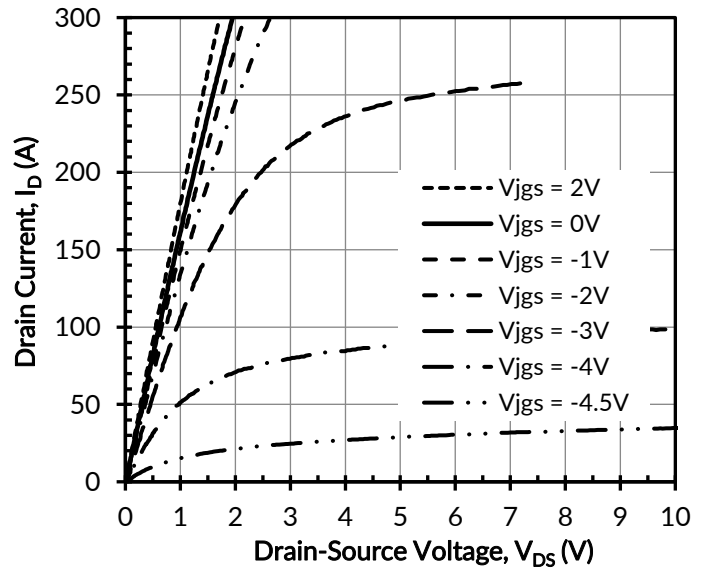


Figure 25. Typical output characteristics with JFET gate as control at $T_J = 25^\circ C$, $t_p < 250\mu s$

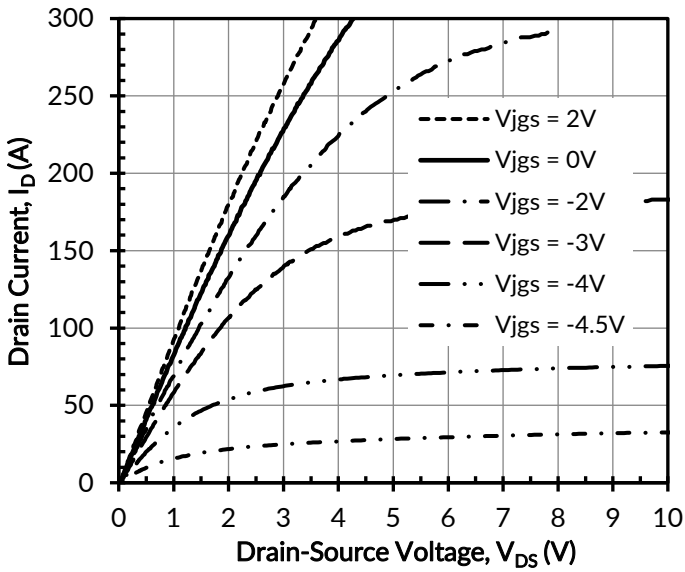


Figure 26. Typical output characteristics with JFET gate as control at $T_J = 175^\circ\text{C}$, $t_p < 250\mu\text{s}$

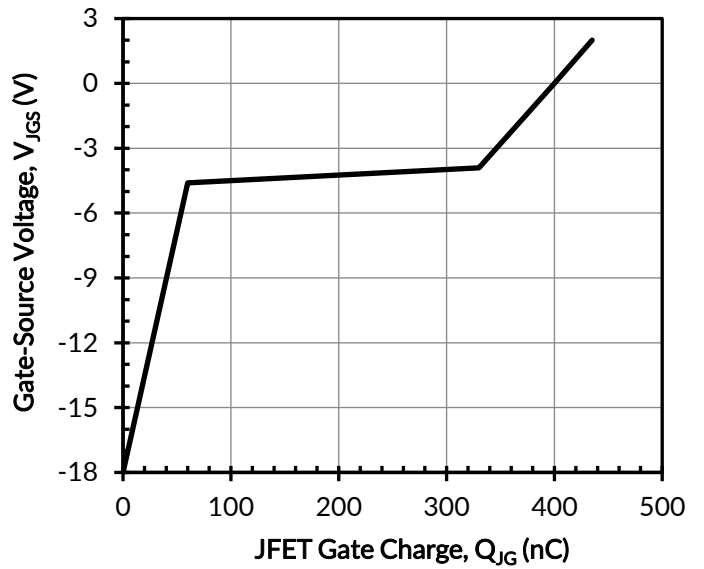


Figure 27. Typical JFET gate charge at $V_{DS} = 400\text{V}$ and $I_D = 80\text{A}$

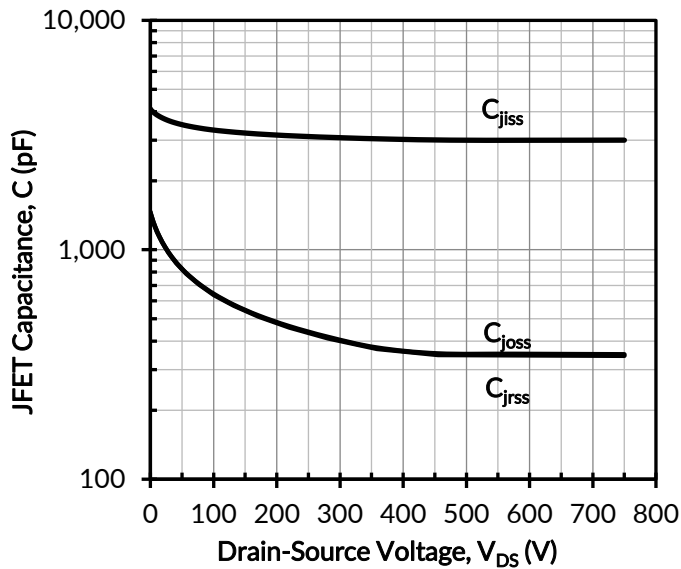


Figure 28. Typical JFET capacitances at $f = 100\text{kHz}$ and $V_{JGS} = -20\text{V}$

Recommended Gate Drive Approach: ClampDRIVE method

Since both JFET gate and MOSFET gate are accessible, more parameters and approaches can be used to control the switching behavior of the device and make the device suitable for a wide range applications from solid state circuit breakers requiring ultra-high current turn-off capability to motor drives requiring well controlled switching speed. The recommended gate drive approach is the ClampDRIVE method, with which the desired turn-on speed, turn-off speed and reverse recovery performance can be achieved at the same time. The main idea of this method is to dynamically tune the JFET gate resistor value R_{JG} such that, in the off-state, R_{JG} is small enough not to cause a reverse recovery issue, and during turn-off transient, R_{JG} is set to a higher value for the desired turn-off performance. This method can be easily implemented using a commercial off-the-shelf gate driver with miller clamp pre-driver output, as illustrated in Figure A. VIN is the gate driver input signal. VO is the gate driver output and CLAMPDRV is the gate driver miller clamp pre-driver output. M2 is the clamp MOSFET used to control the JFET gate resistance. The MOSFET M2 is directly controlled by the CLAMPDRV signal.

In the on-state, CLAMPDRV is low which turns the MOSFET M2 off, thus, the effective JFET gate resistance is R_{JG_OFF} . During the turn-off transient, CLAMPDRV is kept low until the device is fully off. This means the JFET gate resistance is R_{JG_OFF} during the turn-off process, and R_{JG_OFF} can be used to effectively control turn-off speed. After the device is fully off, CLAMPDRV is changed to high level, which turns the MOSFET M2 on.

In the off-state, CLAMPDRV is high and the clamp MOSFET M2 is in on-state. The effective JFET gate resistance is equal to the parallel combination of R_{JG_OFF} and R_{JG_ON} . R_{JG_ON} can be selected small enough to prevent the reverse recovery issue. During the turn-on transient, the JFET gate current may flow from the cascode source through the body diode of the MOSFET M2 and R_{JG_ON} into the JFET gate, so, the turn-on process is also determined by R_{JG_ON} .

In summary, the optimum switching performance of the SiC cascode FETs can be realized with the ClampDRIVE method by selecting proper JFET gate resistors R_{JG_ON} and R_{JG_OFF} .


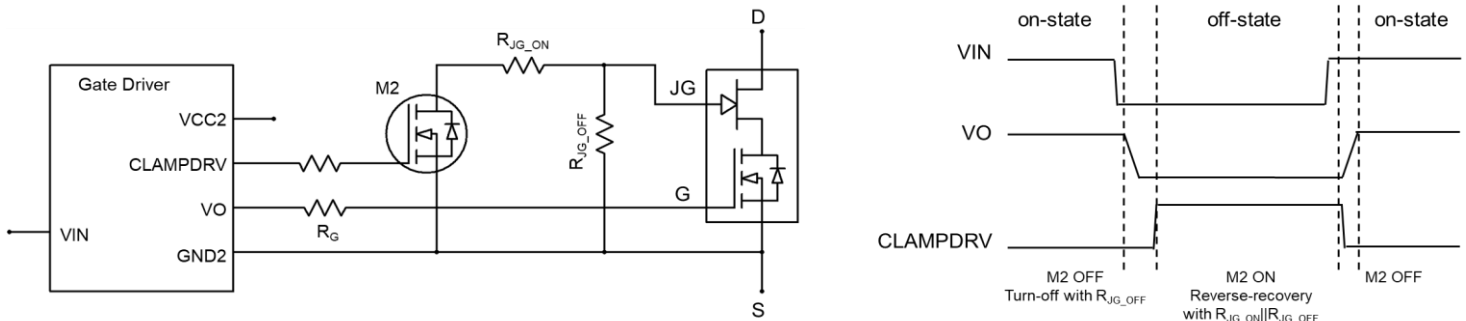


Figure A. Circuit schematic and timing diagram of the ClampDRIVE method

Important notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

PACKAGE OUTLINE

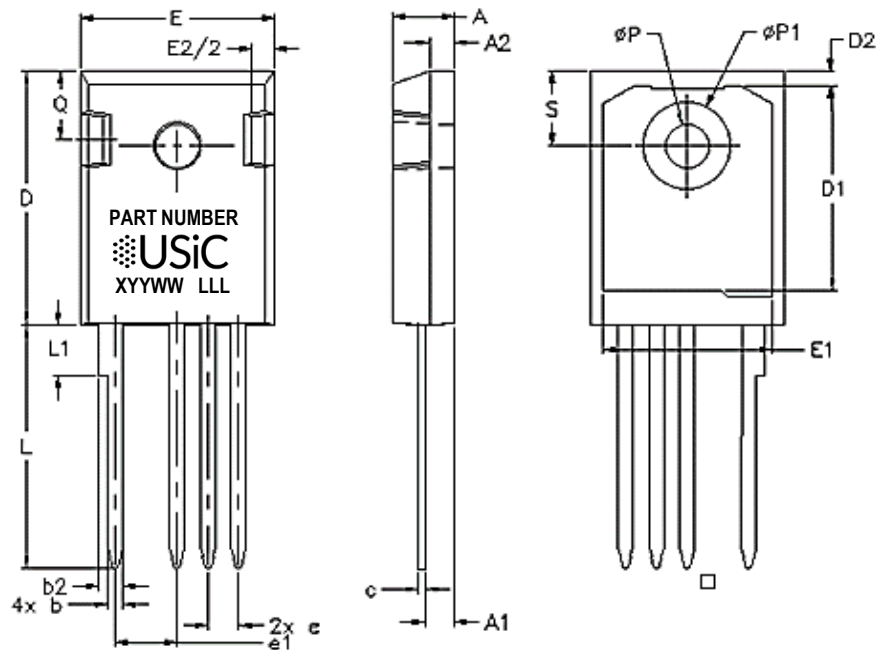

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.185	0.209	4.7	5.31
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.5	2.49
b	0.039	0.055	0.99	1.4
b2	0.065	0.094	1.65	2.39
c	0.015	0.035	0.38	0.89
D	0.819	0.845	20.8	21.46
D1	0.515	-	13.08	-
D2	0.02	0.053	0.51	1.35
E	0.61	0.64	15.49	16.26
e	0.100 BSC		2.54 BSC	
e1	0.19	0.21	4.83	5.33
E1	0.53	-	13.46	-
E2	0.14	0.16	3.56	4.06
L	0.78	0.8	19.81	20.32
L1	-	0.177	-	4.5
ϕP	0.14	0.144	3.56	3.66
ϕP_1	0.278	0.291	7.06	7.39
Q	0.212	0.244	5.38	6.2
S	0.243 BSC		6.17 BSC	



PART MARKING

TO-247-4L PACKAGE OUTLINE, PART MARKING AND TUBE SPECIFICATIONS

PART NUMBER

The logo for USiC, featuring a circular pattern of black dots to the left of the text "USiC" in a large, bold, black sans-serif font.
XYYWW LLL

PART NUMBER = REFER TO
DS_PN DECODER FOR DETAILS

X = ASSEMBLY SITE

YY = YEAR

WW = WORK WEEK

LLL = LOT ID

PACKING TYPE

ANTI-STATIC TUBE

QUANTITY /TUBE : 30 UNITS

DISCLAIMER

United Silicon Carbide, Inc. reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. United Silicon Carbide, Inc. assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

United Silicon Carbide, Inc. assumes no liability whatsoever relating to the choice, selection or use of the United Silicon Carbide, Inc. products and services described herein.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales